




HYDRAULIC 2-POST LIFT

POWER LIFT HL & HDL SST

FOR ALL WEIGHTS AND SIZES

WITH
TECHNOLOGY

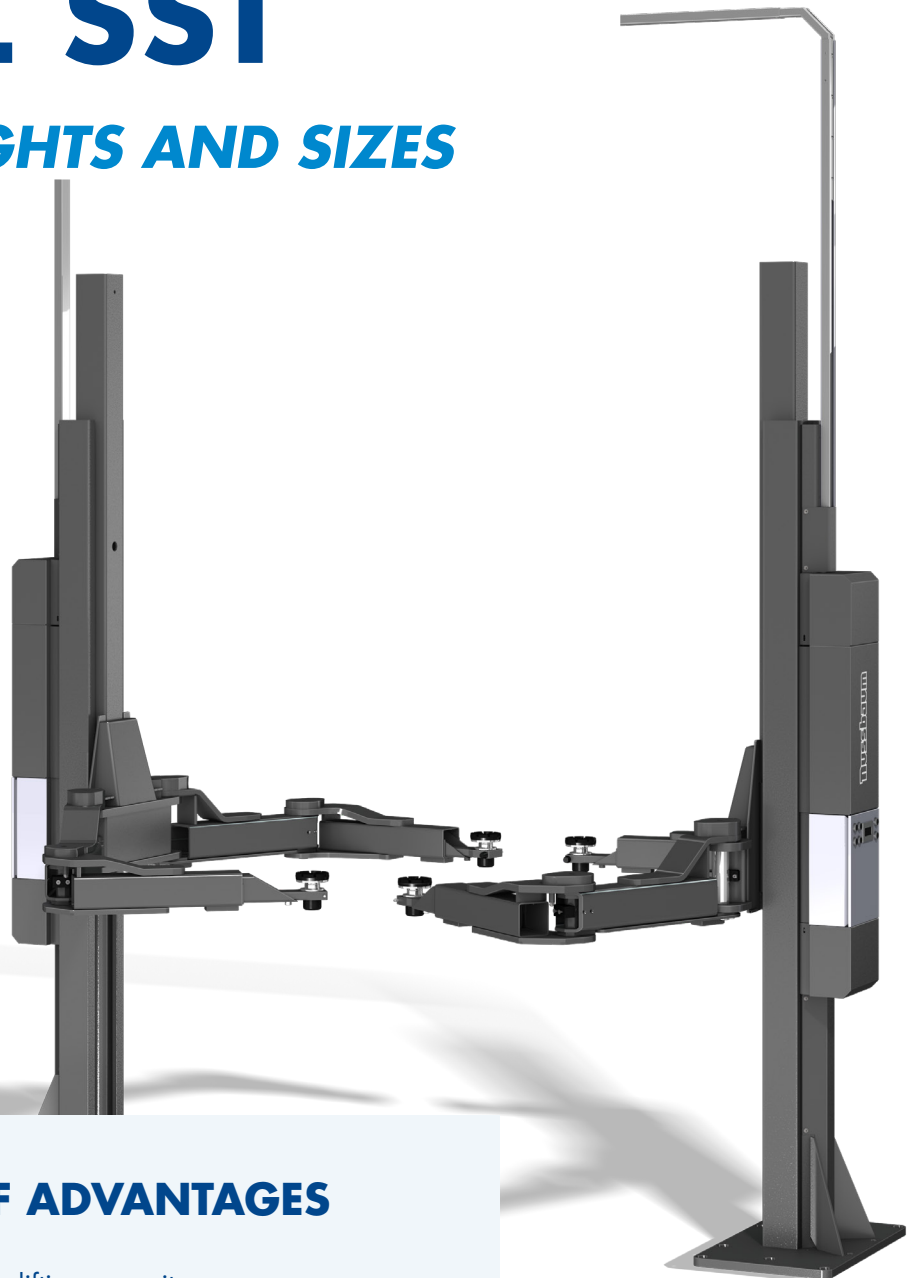

A WIDE RANGE OF ADVANTAGES

- ✓ Double-jointed arms for a wide lifting capacity range
- ✓ Security and synchronization with the SST system by NUSSBAUM
- ✓ No overhead or ground connections on HDL series

6500 KG | 7500 KG | 9000 KG



HYDRAULIC 2-POST LIFT

POWER LIFT HL & HDL SST

The POWER LIFT HDL SST feature NUSSBAUM's patented SST technology: SST ensures mechanical safety in any lifting height without the need for a safety lock. With its double-jointed arms and high lifting capacity (from 6,5 to 9 tons), it covers a wide lifting range from small cars to transporters.

Unique construction with double-jointed arms

- ✓ Lifts all vehicles from short wheelbase cars to long wheelbase transporters
- ✓ All required pick-up points from car manufacturers can be reached safely

VERSIONS

• HL capacity 6,5 - 9 tons

- ✓ 1 power unit
Optional 2nd control unit available
- ✓ Double-jointed (DG) arms
mechanical locking system
Roller-bear for comfortable movement

• HDL SST capacity of 7,5 tons or 9 tons

- ✓ 2 power and 2 control units
- ✓ Double-jointed (DG) arms
Roller-bear for comfortable movement,
with pneumatic locking system
for optimum safety


LOW MAINTENANCE & HIGH SAFETY WITH SST

Low maintenance


Almost wear-free hydraulic cylinders, no synchronization cables and no safety lock needed

High safety

Electronic synchronization to the tenth of the millimetre. **Mechanical locking at every height when the lift stops:** A ball bearing lock fits into the cylinder and mechanically locks the lift at every height.

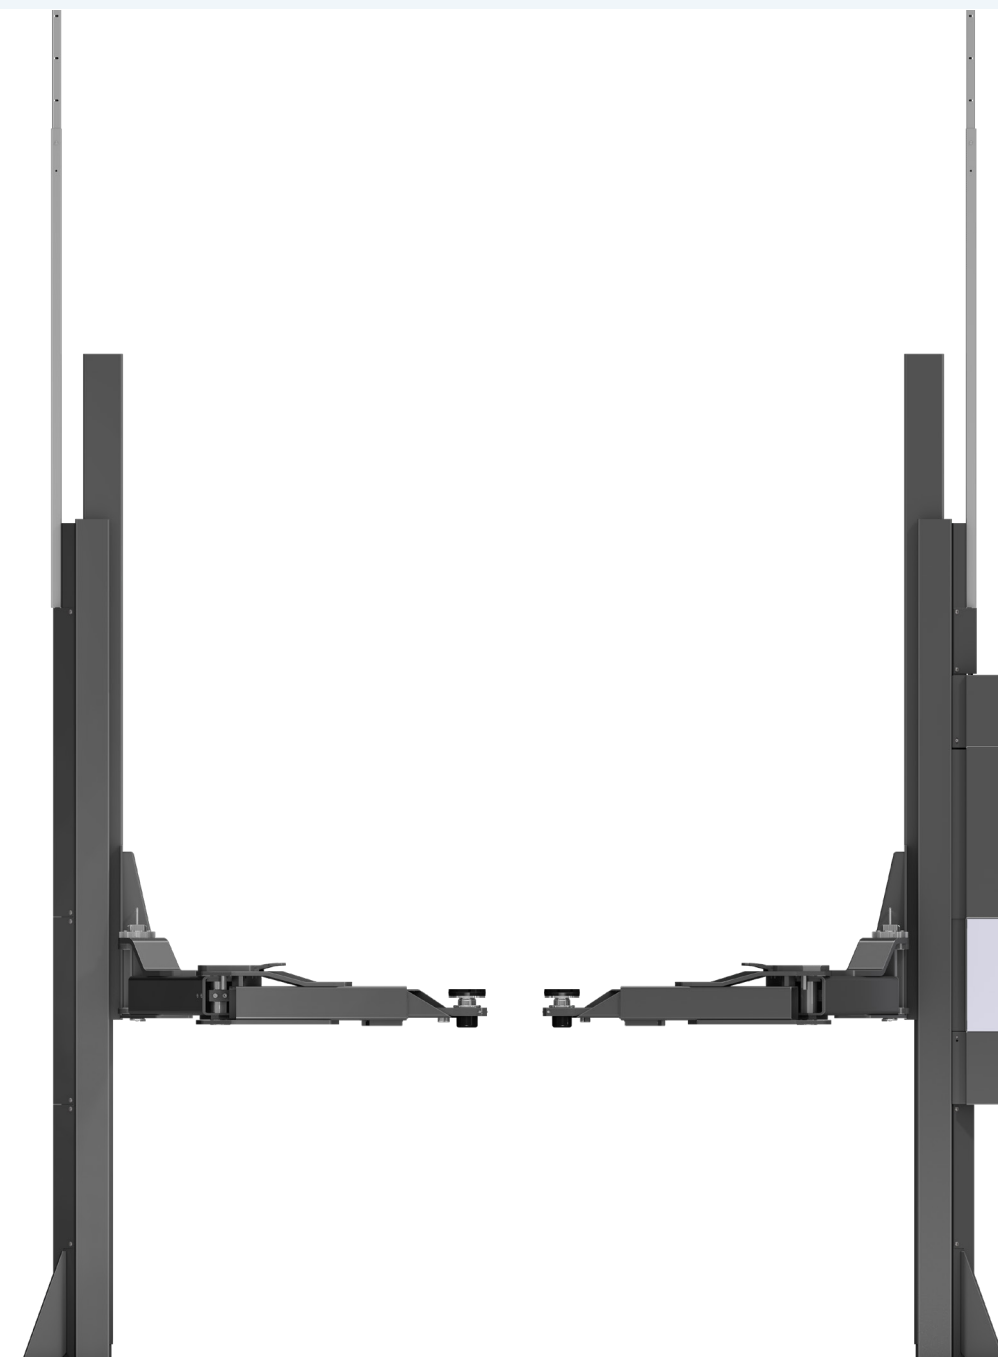


POWER LIFT HL SST & HDL SST: DETAILS THAT MAKE A DIFFERENCE

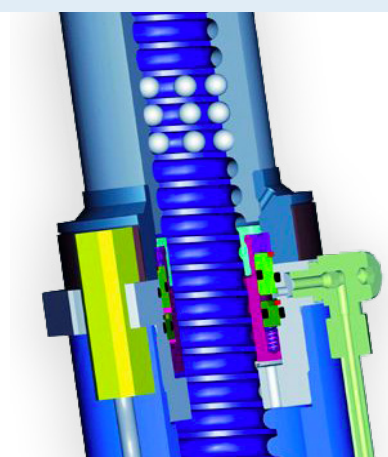

SST stands for SAFETY STAR TECHNOLOGY, a patented NUSSBAUM-technology regulating and monitoring the synchronization of both lift columns to the tenth of a millimeter



The HDL 7500 and HDL 9000 offer 2 control units, one on each side, on HL optional

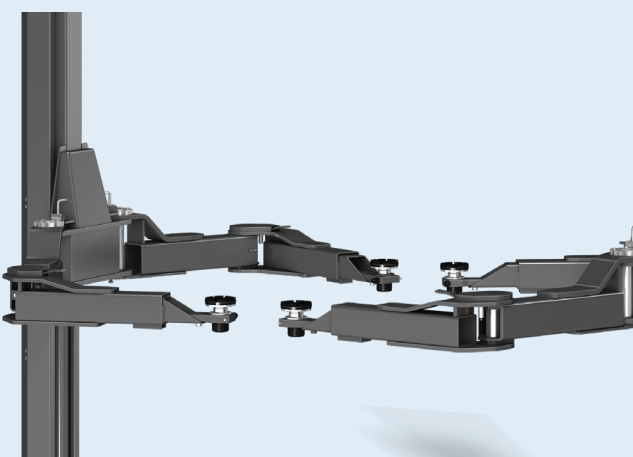

Double-jointed arms (DG): flexible and user friendly, reaching 100% of pick-up points. Pneumatic locking system available for 7,5 and 9 to on HDL series

YOUR MAIN ADVANTAGES

- Adapted for a wide range of vehicles and jobs
- Comfortable handling and safe locking mechanism of double-jointed arms due to pneumatic support
- Patented safety with the SST system by NUSSBAUM



CHOOSE YOUR HL / HDL SST

HL / HDL SST	HL 6500 SST	HL 7500 SST DG	HL 9000 SST DG	HDL 7500 SST DG	HDL 9000 SST DG
Lifting capacity (kg)	6500	7500	9000	7500	9000
Lifting/lowering time approx. (sec)	60/55	60/55	60/55	48/55	48/55
Lifting height (mm)	2101	2111	2111	2127	2127
Lowest lifting point (mm)	121-196	131-206	131-206	147-222	147-222
Total height (mm)	4530-4980	4540-4990	4540-4990	4540-4990	4540-4990
Total width (mm)	3570-3770	3570-3770	3570-3770	3570-3770	3570-3770
Drive-through width (mm)	2513-2713	2520-2720	2520-2720	2520-2720	2520-2720
Distance between columns (mm)	2765-2965	2778-2978	2778-2978	2778-2978	2778-2978
Arm extraction (mm) <i>Version DG</i>	0-1833	0-1833	0-1833	0-1833	0-1833
Arm lock	mechanical	mechanical	mechanical	pneumatic	pneumatic
Power unit	1	1	1	2	2
Power supply (V / Hz / A)	400/50/16	400/50/16	400/50/16	400/50/32	400/50/32


ACCESSORIES




Height adapter round



Adapter for Mercedes Sprinter



Height adapter U-form



Wheelfork-Adapter



Mini-Max-Adapter

**More accessories
available**