Nussbaum

INGROUND 2-PISTON LIFT

TOP LIFT 2.50 TLK

SURFACE MOUNTED

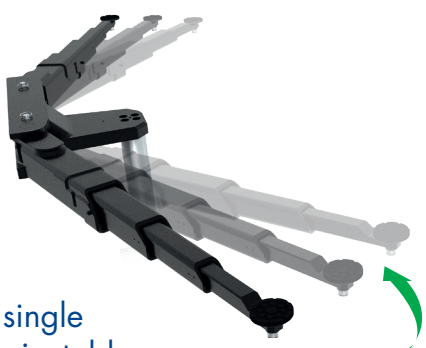

single pivotable

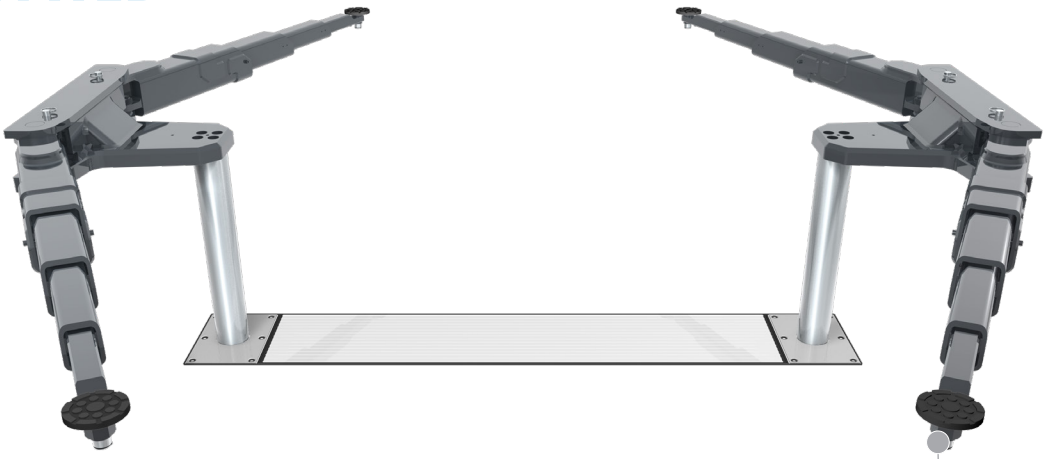

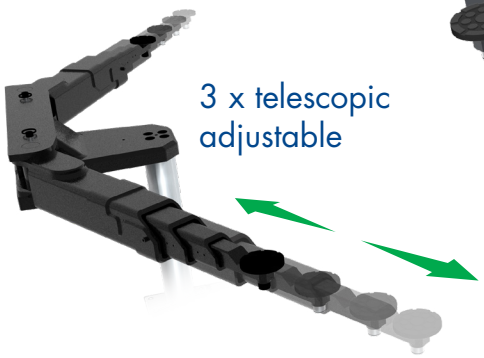

3 x telescopic adjustable

powder coated swivel arms

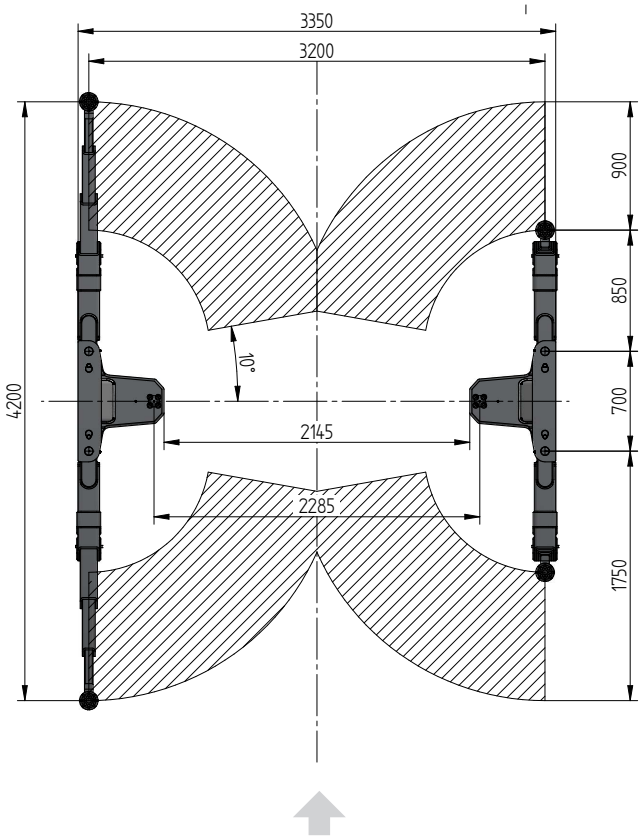

TECHNICAL DATA

Capacity	5000	kg
Effective raise height	2037	mm
Move in height	120	mm
Piston diameter	123	mm
Piston distance	2285	mm
Installation depth	2408	mm
Motor output	3,0	kW
Power connector	400 V/16 A	
Cable length to control	11	m
Lifting time	≈ 35	sec.
Lowering time	≈ 35	sec.

Arms 2.50 TLK	0016800
Installation cassette 2285 mm	0015744
Lifting unit 5,0 t 2285 mm - K pre-assembled in installation cassette	0016590

ACCESSORIES

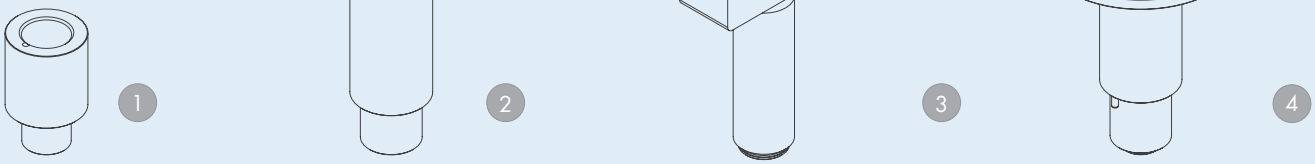

1 | Stacking adapter extension 80 mm
d 45 x 80 mm
0016741 (1Set / 4 Pieces)

2 | Stacking adapter extension 130 mm
d 45 x 130 mm
0016742 (1Set / 4 Pieces)

3 | Stacking adapter V-shape
d 45 / 182 - 312 mm
0016744 (1Set / 4 Pieces)

4 | Stacking adapter U-form
d 130 x d 45 / 193-295mm
0016745 (1Set / 4 Pieces)



Bracket for stacking-adapter extension
0016751



Wheel lifting adapter
0016753 (1Set / 4 Pieces)

Techn. Änderungen und Fehler vorbehalten. Gilt ab 01 2022 © Nussbaum Automotive Lifts GmbH | Korker Str. 24 | 77694 Kehl | Germany
Tel.: +49 (0) 7853 899 – 0 | Fax: +49 (0) 7853 8787 | info@nussbaumlifts.com | nussbaumlifts.com