
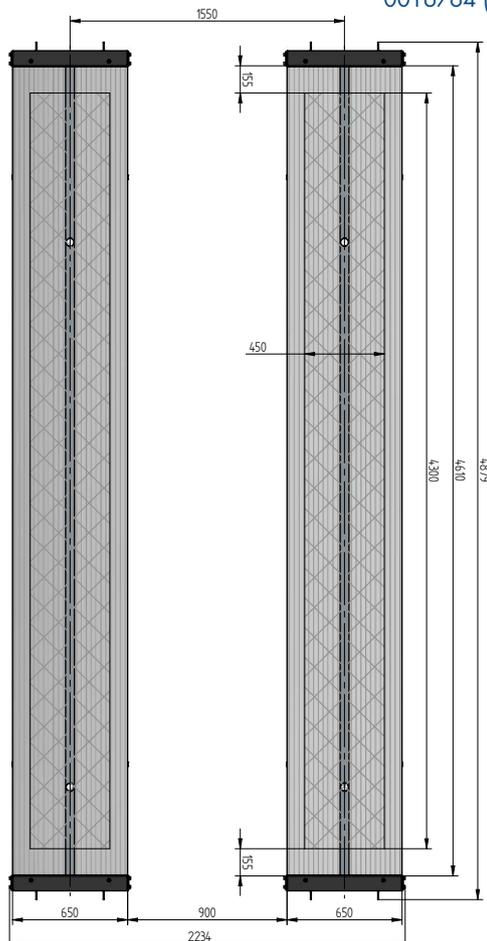


INGROUND 4-PISTON LIFT

TOP LIFT 4.40 TLA

SURFACE MOUNTED

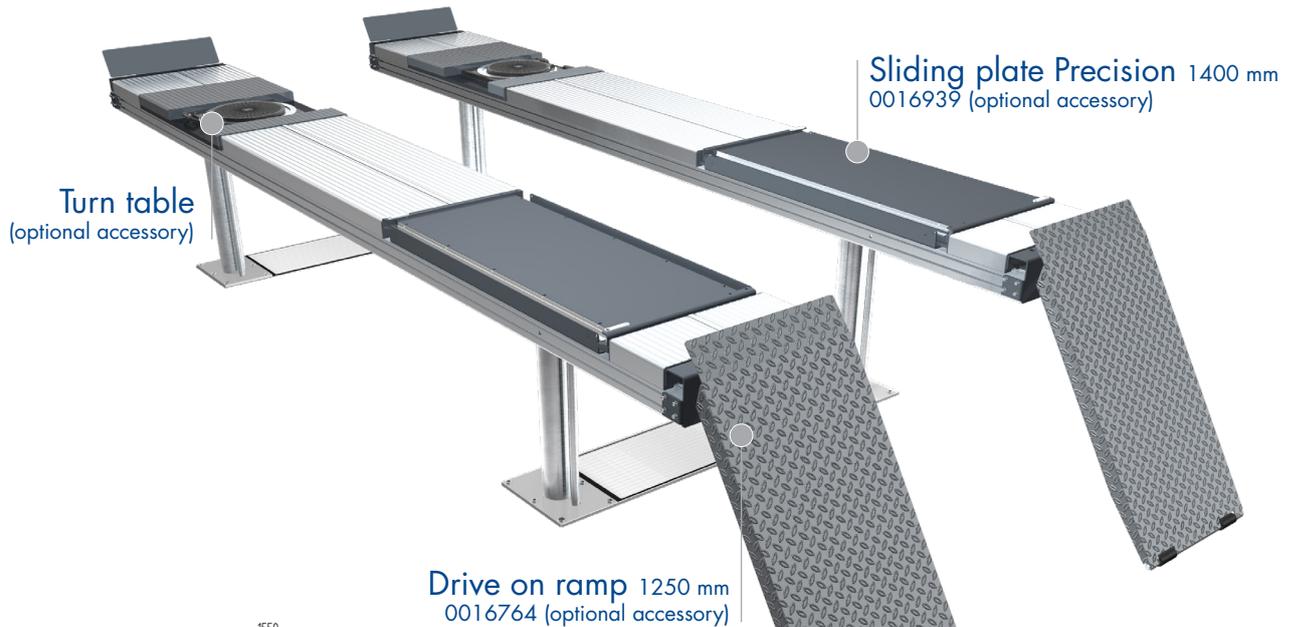

TECHNICAL DATA

| | |
|-------------------------|------------|
| capacity | 4000 kg |
| effect. raise height | 2008 mm |
| platform length | 4800 mm |
| platform height | 180 mm |
| piston diameter | 123 mm |
| piston distance | 1550 mm |
| installation depth | 2443 mm |
| motor output | 3,0 kW |
| power connector | 400 V/16 A |
| cable length to control | 11 m |
| lifting time | ≈ 35 sec. |
| lowering time | ≈ 35 sec. |

Platform 4.40 TLA with platform notches for turn tables and sliding plates 0016935

Platform 4.40 TLA 0016933

Installation cassettes 1550 mm 0016928


Lifting unit 4,0 t 1550 mm - K pre-assembled in installation cassette 0016931



ACCESSORIES




Drive on ramp
1250 mm
0016764



Sliding plate
precision 1400 mm
0016939




Lighting
LED
0016903

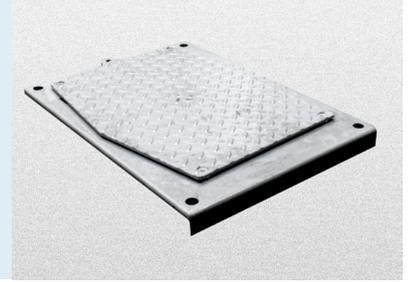


Play detector




Slide rail
4800 mm
0016911

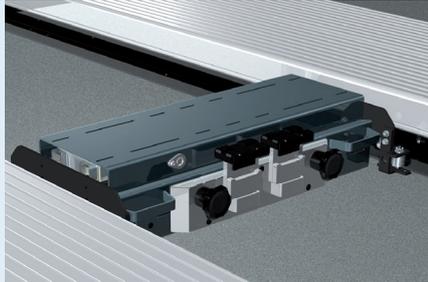

Axle Jack 2600 kg
pneumatic, without running rail
0016767

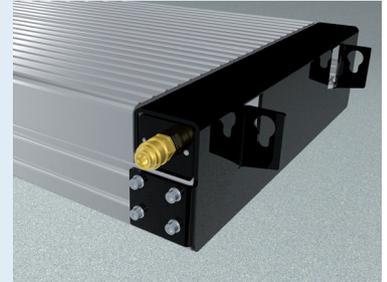

Compressed air supply
0016769

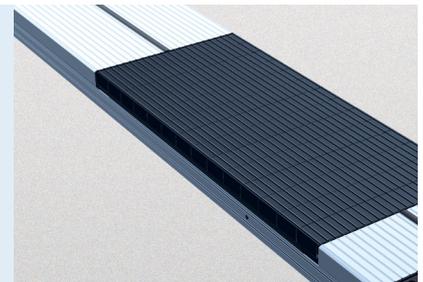

Rubber elements
50 mm 100 mm 200 mm
0017301 0017302 0017303